


QSHF650-3216 高通滤波器


★电性能指标 Electrical properties(at 25°C)

NO.	Item (项目)	Specification (特性)
1	Passband 通带	850-2000 MHz
2	Insertion Loss 插入损耗	≤1.5dB
3	V. S. W. R(in BW) 驻波比	≤2 (760-1700 MHz)
4	Attenuation 阻带抑制	≥40dB (at 390 MHz) ≥20dB (at 480 MHz)
5	Permissible Input Power 输入功率 (MAX)	3 W
6	In/Output Impedance 输入/输出阻抗	50 Ω

Character 特性曲线

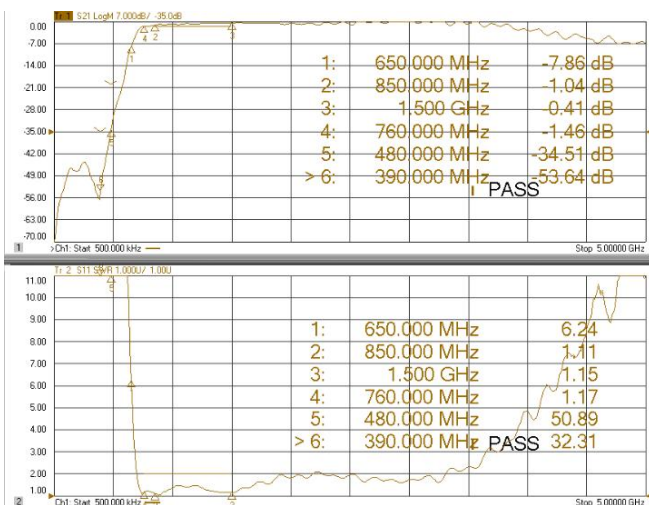

Dimensions 外型尺寸

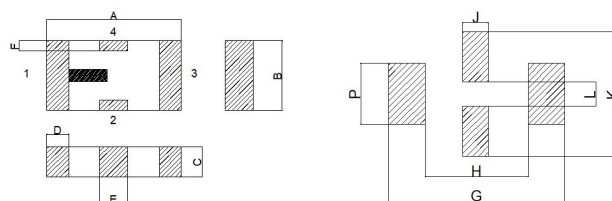

尺寸 单位: mm										
A	B	C	D	E	F	G	H	J	K	L
3.2 ± 0.2	1.6 ± 0.2	1.0 ± 0.4	0.5 ± 0.1	0.8 ± 0.1	0.23 ± 0.1	4.3 ± 0.1	2.2 ± 0.1	0.6 ± 0.1	3.1 ± 0.1	0.6 ± 0.1

注: 1 端口为输入端; 3 端口为输出端; 2、4 端口为接地端。