



标准要求:

&符合 IEEE 802.3an标准

&符合ROHS标准

&电感:350uH Min@100KHz 100mV 8mA Bias


&工作温度范围: -40°C ~ +85°C

&存储温度范围: -50°C ~ +125°C

电气特性在+25° C, 除非有特殊说明

圈比	电感 @100KHz, 100mV Bias uH Min	漏感 @100KHz 100mV uH Max	耐压 Vrms Min 2mA 60S	直流电阻 Ωmax	插入损耗 dB Max	回输损耗				串抗			共模扼制比		
						@1-100MHz	@1-40MHz	@50MHz	@60-80MHz	@100MHz	@30MHz	@60MHz	@100MHz	@30MHz	@60MHz
1:1±2%	350	0.5	1500	1.4	-1.0	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33

机械图

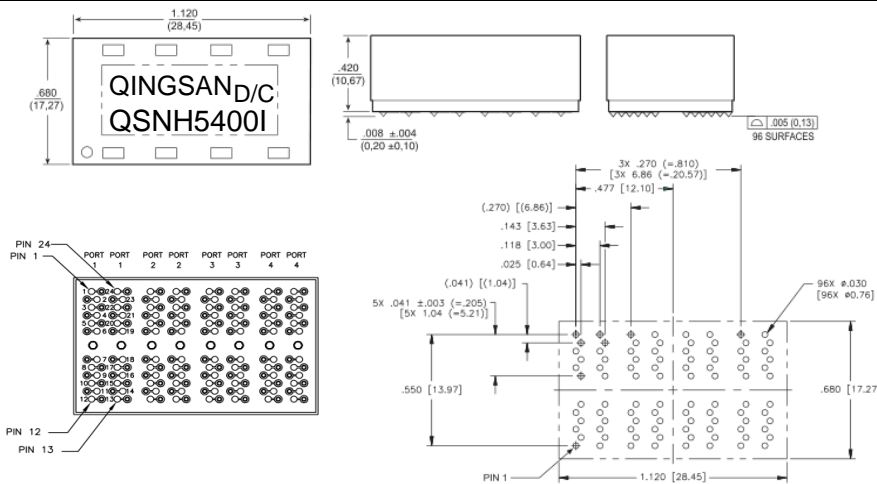

电路原理图

