

标准要求:

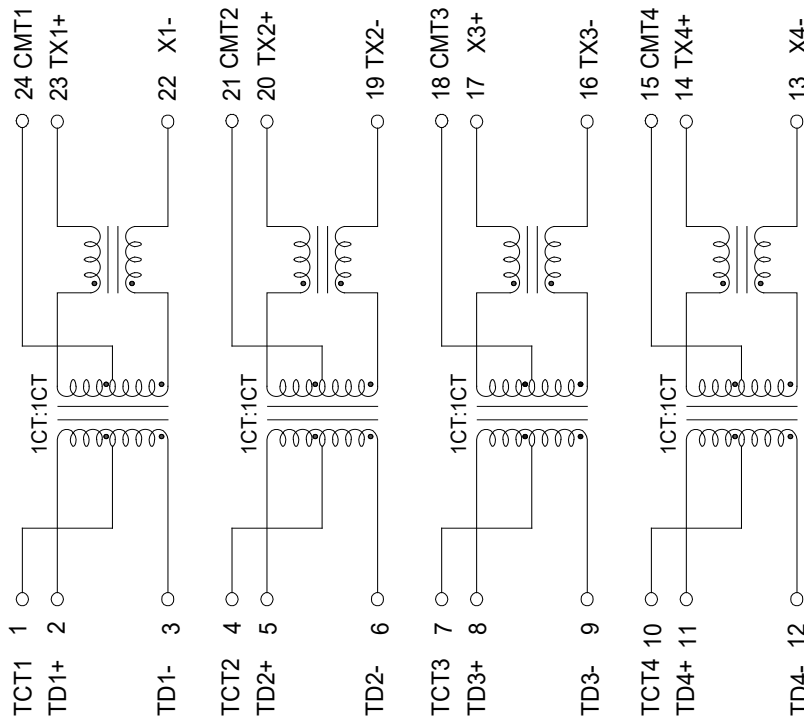
- &符合 IEEE 802.3ab标准
- &适用700mA电流能力的POE应用
- &回流焊最高温度: 245°C ± 3°C
- &工作温度范围: -55°C ~ +125°C
- &存储温度范围: -55°C ~ +125°C

电气特性 (常温 25°C)

Part NO.	Turns Ratio (1.0±2%)		OCL (uH Min) 100KHz/0.1V With 8mA DC Bias	L.L (uH Max) 100KHz/0.1V	DCR (Ω Max)	HI-POT (Vrms) 1mA/6S
	TX	RX				
QSNT1001N	1CT:1CT	1CT:1CT	350	0.5	1.5	1500 VAC

电气特性 (常温 25°C)

Part NO.	Insertion Loss (dB max) MHz	Return Loss(dB min) MHz			Crosstalk (dB min) MHz	DCMR (dB min) MHz		
		1-30	30-60	60-80		1-30	30-60	60-80
QSNT1001N	-1.0	-20.0	-14.0	-12.0	-32.0	-42	-37	-32

产品电路原理图

产品尺寸图
